

DOUBLE DISC CHECK VALVE

FEATURES:

- **Nominal pressure:** PN10 and PN16
- **Operating temperature:** from -20°C to 125°C
- **Tests:** According to UNE-EN 12266-1
- **Design of the flanges:** According to UNE-EN 1092




MATERIALS:

- **Body:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Disc and spring:** Stainless steel AISI 304 according to UNE-EN 10088-1
- **Shaft:** Stainless steel AISI 416
- **Seat:** EPDM according to UNE-EN 681-1
- **Coating:** Epoxy polyamide (average thickness 250 µm, RAL 5015) according to UNE-EN 14901-1+A1



DIMENSIONS:

	DESCRIPTION	MATERIAL
1	Body	EN-GJS-500-7
2	Seat	EPDM
3	Gasket	EPDM
4	Disc	SS304
5	Spring	SS304
6	Shaft	SS416

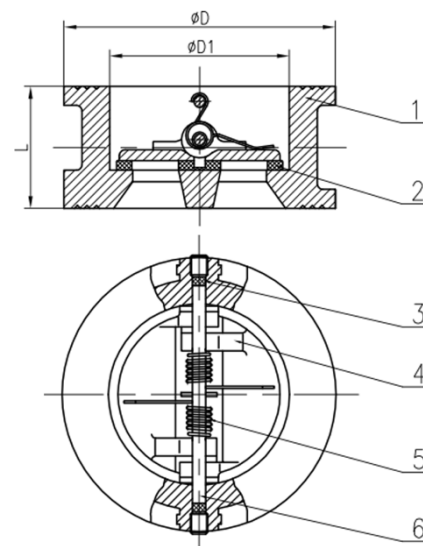

REF	DIMENSION	DN	L	D	D1
1401	2"	50	43	107	65
1402	2 1/2"	65	46	127	80
1403	3"	80	64	142	94
1404	4"	100	64	162	117
1405	5"	125	70	192	145
1406	6"	150	76	218	170
1407	8"	200	89	273	224
1408	10"	250	114	328	265
1409	12"	300	114	383	310
1410	14"	350	127	444	360