

WAFER BUTTERFLY VALVE

FEATURES:


- **Nominal pressure:** PN10 and PN16
- **Operating temperature:** from 0°C to 80°C
- **Testing:** according to GB/T 13927-2008
- **Flanges dimensions:** according to BS 4504
- Drive with handle or handwheel



MATERIALS:

- **Body:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Spindle:** Stainless steel AISI 420
- **Disc:** Stainless steel AISI 316 according to UNE-EN 10088-1
- **Gasket:** EPDM according to UNE-EN 681-1
- **Coating:** Blue (RAL 5015) epoxy polyamide coating, average thickness 250 µm, according to UNE-EN 14901-1+A1

DIMENSIONS:

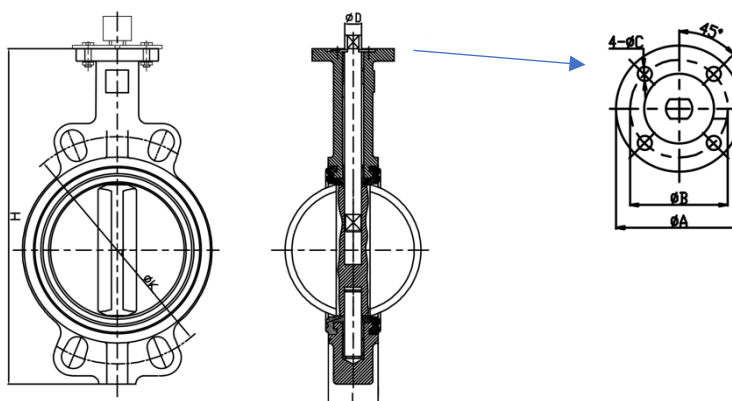

REF	DIMENSION	DN	A	B	C	D	H	K	L
1416	2"	50	65	50	8	12,6	195	125	42
1417	2 ½"	65	65	50	8	12,6	230	145	45
1418	3"	80	65	50	8	12,6	240	160	46
1419	4"	100	90	70	10	15,8	280	180	52
1420	5"	125	90	70	10	18,9	310	210	56
1421	6"	150	90	70	10	18,9	340	240	56
1422	8"	200	125	100	12	22,1	405	295	60
1423	10"	250	125	100	12	28,5	480	355	65,5
1424	12"	300	125	100	12	31,6	545	410	76,5