

## FLANGED Y STRAINER

### FEATURES:

- **Flange dimensions according to:** UNE-EN 1092-2
- **Nominal pressure:** PN10 and PN16
- **With ACS product certificate**




### MATERIALS:

- **Body:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Cover:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Sieve:** Stainless steel AISI 304
- **Gasket filter:** NBR
- **Coating:** Blue (RAL 5015) epoxy polyamide, average thickness 250µm, according to UNE-EN 14901-1+A1



### DIMENSIONS:

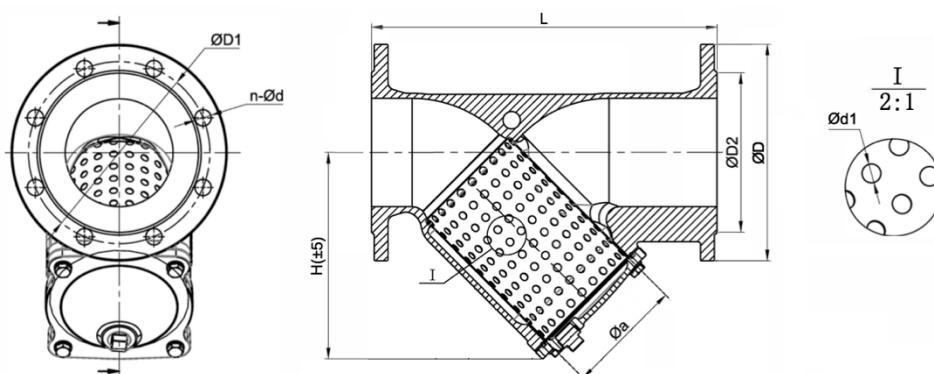

| REF  | DN  | L    | D<br>(PN10/16) | D1<br>(PN10/16) | D2<br>(PN10/16) | n-d<br>(PN10/16) | H    | a   | d1  |
|------|-----|------|----------------|-----------------|-----------------|------------------|------|-----|-----|
| 1460 | 50  | 230  | 165            | 125             | 99              | 4-19             | 130  | 58  | 1,5 |
| 1461 | 65  | 290  | 185            | 145             | 118             | 4-19             | 155  | 76  | 1,5 |
| 1462 | 80  | 310  | 200            | 160             | 132             | 8-19             | 180  | 92  | 1,5 |
| 1463 | 100 | 350  | 220            | 180             | 156             | 8-19             | 206  | 112 | 2   |
| 1464 | 125 | 400  | 250            | 210             | 184             | 8-19             | 240  | 136 | 2   |
| 1465 | 150 | 480  | 285            | 240             | 211             | 8-23             | 300  | 162 | 2   |
| 1466 | 200 | 600  | 340            | 295             | 266             | 8-23 / 12-23     | 360  | 210 | 2   |
| 1467 | 250 | 730  | 400            | 350 / 355       | 319             | 12-23 / 12-28    | 450  | 264 | 3   |
| 1468 | 300 | 850  | 455            | 400 / 410       | 370             | 12-23 / 12-28    | 510  | 320 | 3   |
| 1469 | 350 | 980  | 520            | 460 / 470       | 429             | 16-23 / 16-28    | 600  | 380 | 3   |
| 1470 | 400 | 1100 | 580            | 515 / 525       | 480             | 16-28 / 16-31    | 680  | 425 | 3   |
| 1471 | 500 | 1250 | 715            | 620 / 650       | 582 / 609       | 20-28 / 20-34    | 860  | 518 | 3   |
| 1472 | 600 | 1450 | 840            | 725 / 770       | 682 / 720       | 20-31 / 20-37    | 1022 | 618 | 3   |