

BALL CHECK VALVE

FEATURES:

- **Nominal pressure:** PN16
- **Operating temperature:** from 0°C to 80°C
- **Testing:** set carried out according to UNE-EN 12266-1
- **Flanges dimensions:** according to UNE-EN 1092-2




MATERIALS:

- **Body:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Cover:** Ductile iron EN-GJS-500-7 according to UNE-EN 1563
- **Cap:** Stainless steel AISI 304
- **Gasket lid:** NBR
- **Coating:** Blue (RAL 5015) epoxy polyamide coating, average thickness 250 µm, according to UNE-EN 14901-1+A1

DIMENSIONS:

	DESCRIPTION	MATERIAL
1	Body	EN-GJS-500-7
2	Cap	AISI 304
3	Ball	Steel + NBR
4	Gasket	NBR
5	Bonnet	EN-GJS-500-7
6	Screws	A2-70
7	Washer	A2-70

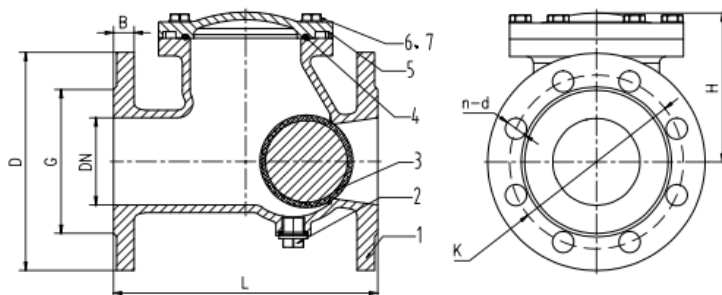

REF	DN	L	H	D	K	G	n-d	B
1476	50	200	98	165	125	99	4-19	19
1477	65	240	115	185	145	118	4-19	19
1478	80	260	137	200	160	132	8-19	19
1479	100	300	154	220	180	156	8-19	19
1480	125	350	180	250	210	184	8-19	19
1481	150	400	220	285	240	211	8-23	19
1482	200	500	287	340	295	266	12-23	20
1483	250	600	355	405	355	319	12-28	22
1484	300	700	425	460	410	370	12-28	24,5