

PVC / PE SADDLE

FEATURES:


- **Nominal pressure:** PN 10 and PN16
- **Tests:** according to UNE-EN 12842
- The bolt holes are coated to protect against corrosion
- **With ACS product certificate**



MATERIALS:

- **Body:** Ductile iron EN-GJS-500-7 (equivalent to GGG 50) according to UNE-EN 1563
- **Gasket:** EPDM according to UNE-EN 681-1
- **Bolts and washers:** Stainless steel AISI 304 according to UNE-EN 10088-1
- **Coating:** Epoxy polyamide (average thickness 250 µm, RAL 5015) according to UNE-EN 14901-1+A1

DIMENSIONS:

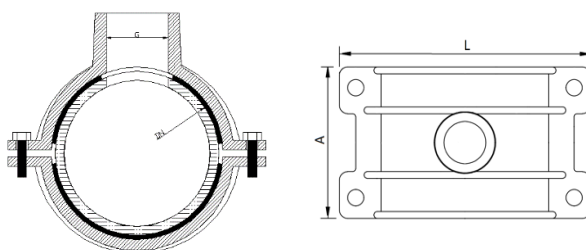

REF	PE/PVC	THREAD	L	A	No. BOLTS
5003	50	3/4"	117	100	4 x M10 x 65
5004		1"			
5006	63	3/4"	132	100	4 x M10 x 65
5007		1"			
5008		1 1/4"			
5009		1 1/2"			
5010		2"			
5011	75	3/4"	144	100	4 x M10 x 65
5012		1"			
5013		1 1/4"			
5014		1 1/2"			
5015		2"			

REF	PE/PVC	THREAD	L	A	No. BOLTS
5016	90	3/4"	153	100	4 x M10 x 65
5017		1"			
5018		1 ¼"			
5019		1 ½"			
5020		2"			
5021	110	3/4"	184	110	4 x M10 x 65
5022		1"			
5023		1 ¼"			
5024		1 ½"			
5025		2"			
5026	125	3/4"	192	110	4 x M10 x 65
5027		1"			
5028		1 ¼"			
5029		1 ½"			
5030		2"			
5031	140	3/4"	215	110	4 x M10 x 65
5032		1"			
5033		1 ¼"			
5034		1 ½"			
5035		2"			
5037	160	3/4"	236	125	4 x M10 x 65
5038		1"			
5039		1 ¼"			
5040		1 ½"			
5041		2"			
5049	200	3/4"	295	125	4 x M10 x 80
5050		1"			
5051		1 ¼"			
5052		1 ½"			
5053		2"			
5054		2 ½"			
5055		3"			
5056	250	3/4"	304	180	4 x M12 x 80
5057		1"			
5058		1 ¼"			
5059		1 ½"			
5060		2"			
5061		2 ½"			
5062		3"			
5063	315	3/4"	426	180	4 x M12 x 80
5064		1"			
5069		1 ¼"			
5065		1 ½"			
5066		2"			
5067		2 ½"			
5068		3"			