

DISMANTLING JOINT

FEATURES:

- **Nominal pressures:** PN16 and PN25
- **Dimensions between flanges:** UNE-EN 1092-1




MATERIALS:

- **Body:** Stainless steel AISI 304
- **Flanges:** Carbon steel ST-37.2
- **Gasket:** EPDM according to UNE-EN 681-1 (NBR optionally)
- **Bolts:** Stainless steel AISI 304
- **Coating:** Blue or violet epoxy polyamide coating with ACS certificate according to UNE-EN 14901-1+A1




DIMENSIONS:

PN 16

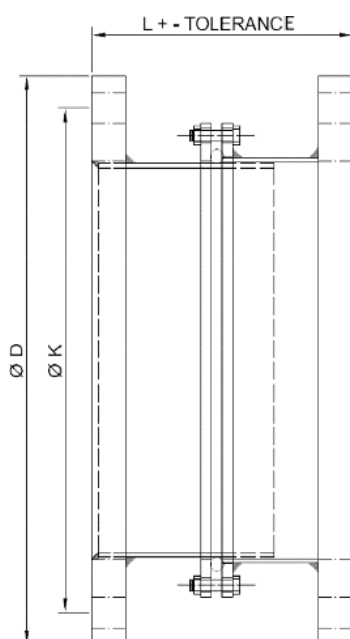

REF	DN	L + TOLERANCE	ØD	ØK
3046	50	180 ± 30	165	125
3047	65	180 ± 30	185	145
3048	80	180 ± 30	200	160
3049	100	180 ± 30	220	180
3050	125	180 ± 30	250	210
3051	150	180 ± 30	285	240
3052	200	220 ± 40	340	295
3053	250	220 ± 40	405	355
3054	300	220 ± 40	460	410
3055	350	250 ± 40	520	470
3056	400	250 ± 40	580	525
3057	450	250 ± 40	640	585
3058	500	250 ± 40	715	650
3059	600	300 ± 50	840	770
3060	700	300 ± 50	910	840
3061	800	300 ± 50	1025	950

PN 25

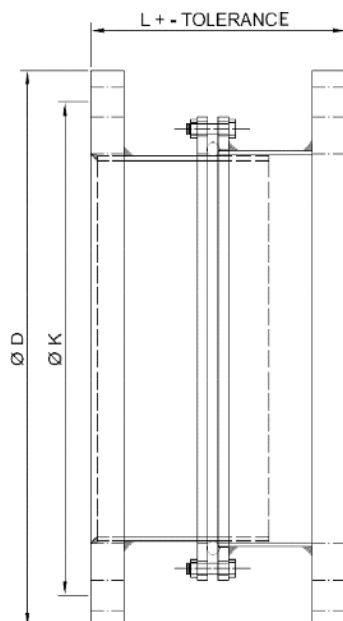

REF	DN	L + TOLERANCE	ØD	ØK
3062	50	180 ± 30	165	125
3063	65	180 ± 30	185	145
3064	80	180 ± 30	200	160
3065	100	180 ± 30	220	190
3066	125	180 ± 30	235	220
3067	150	180 ± 30	270	250
3068	200	220 ± 40	300	310
3069	250	220 ± 40	360	370
3070	300	220 ± 40	425	430
3071	350	250 ± 40	485	490
3072	400	250 ± 40	555	550
3073	450	250 ± 40	620	600
3074	500	250 ± 40	670	660
3075	600	300 ± 50	730	770
3076	800	300 ± 50	960	990

**Possibility of manufacturing in other lengths and tolerances*