


THREADED GATE VALVE

FEATURES:

- Nominal pressure: **PN16**
- Clockwise closure
- ACS certificate for epoxy polyamide coating and EPDM

MATERIALS:

	DESCRIPTION	MATERIAL
1	Body	EN-GJS-500-7 (equivalent to GGG50)
2	Disc and disc coating	EN-GJS-500-7 (equivalent to GGG50) + EPDM
3	Disc nut	CW617N
4	Gasket	EPDM
5	Stem	AISI 420
6	Screw	Galvanized steel
7	Bonnet	EN-GJS-500-7 (equivalent to GGG50)
8	Gasket	PTFE
9	Holding ring	CW617N (DN20-32) / AISI 420 (DN40-50)
10	O-ring	NBR
11	Nut	CW617N
12	Dust ring	EPDM
13	Square handle	EN-GJS-500-7 (equivalent to GGG50)
14	Screw	Galvanized steel

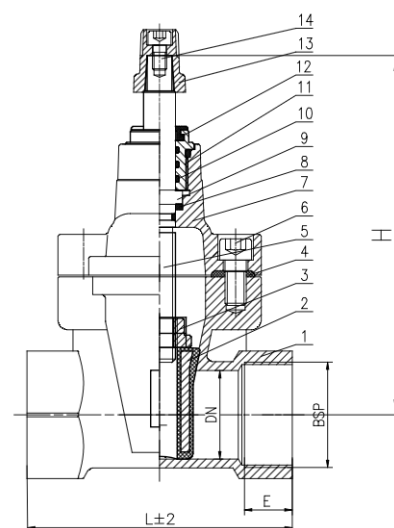

DIMENSIONS:

REF	DN	THREAD	L	E	H	S	F	M	h	d1	Z
1635	20	3/4"	129	24	150	12	35	M8	12	6	23
1636	25	1"	129	24	150	12	35	M8	12	6	23
1637	32	1 1/4"	129	24	150	12	35	M8	12	6	23
1638	40	1 1/2"	150	27	215	14	25	M8	12	6	20
1639	50	2"	150	27	218	14	25	M8	12	6	20

